

Indoor Digital Signage

Touch Inquiry Interactive all-in-one machine




Embark on a new era of
intelligent advertising, more
interactive and efficient



HD and ultra-HD vision, bid farewell to dazzling and blurry displays



Reassured IPS anti-explosive screen, using A+ screen, pure color, covering RGB wide color gamut, rich and gorgeous colors, clear and smooth playback, more realistic and live pictures and videos

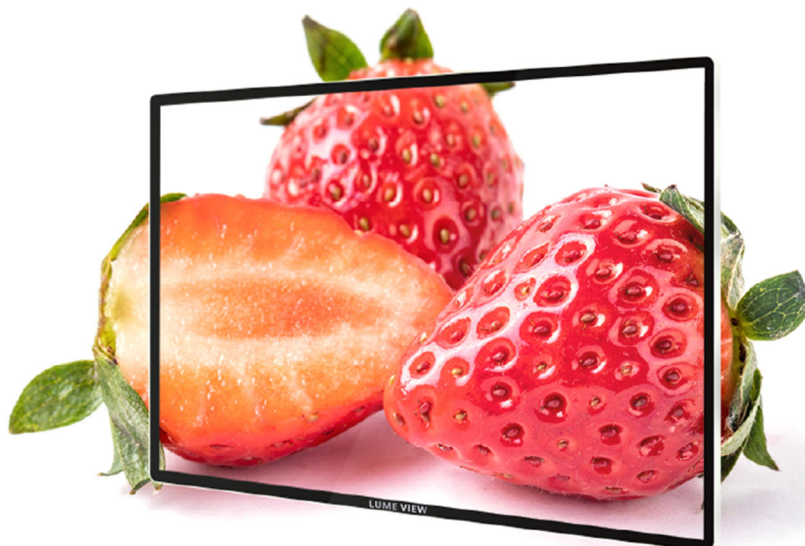



Remote management and unified control

Targeting multi-point layout and multiple machines, supporting remote network management, allowing for easy advertising placement without leaving home

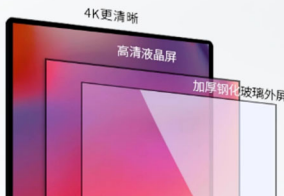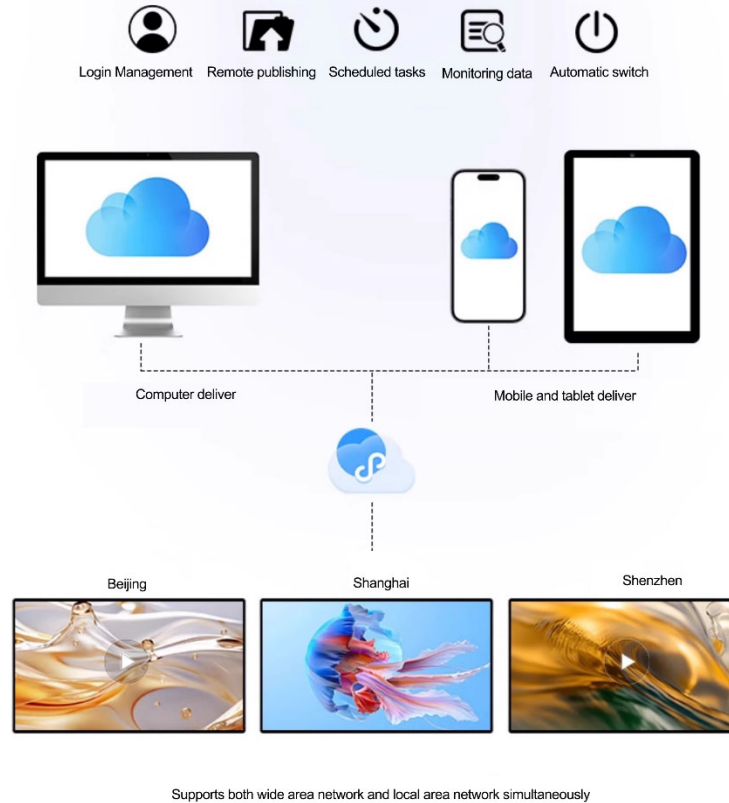


Thick tempered glass

2K/4K resolution 16.7M color depth, rich picture quality and vivid colors

Auto loop, Intelligent split screen playback

Supports multiple split screen modes, allowing images, videos, and text to be played simultaneously, creating vivid and beautiful images



Display timed power on/off in different time periods

Support customized program playback and power on/off in different time periods divided

Horizontal and vertical screen switching

Change the hanging method freely according to the size of the material



24/7 uninterrupted operation display

Equipped with 24/7 continuous operation quality, with a durable bulk design that extends the service life to a limited extent.



Multi touch precise touch

Multi touch needs to be upgraded with touch function









Specification




Model	LM-LCG32SN	LM-LCG43SN	LM-LCG50SN	LM-LCG55SN	LM-LCG65SN	LM-LCG75SN	LM-LCG85SN	LM-LCG98SN
Display								
Screen Size(inch)	32	43	50	55	65	75	85	98
Display Area(mm) (H/V)	698×393	941×530	1096×616	1210×681	1430.8×806.3	1652×930	1883.7×1054.6	2158.8×1215
Resolution (H/V)	1920 x 1080 (2K)	1920 x 1080 (2K)	1920 x 1080 (2K)	1920 x 1080 (2K)	3840 x 2160 (4K)	3840 x 2160 (4K)	3840 x 2160 (4K)	3840 x 2160 (4K)
Panel Type	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS
Aspect Ratio	16: 9	16: 9	16: 9	16: 9	16: 9	16: 9	16: 9	16: 9
Refresh Frequency	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
Display Color	1.07B (10bit)	1.07B (10bit)	1.07B (10bit)	1.07B (10bit)	1.07B (10bit)	1.07B (10bit)	1.07B (10bit)	1.07B (10bit)
Contrast Ratio (Typ.)	1200: 1	1200: 1	1200: 1	1200: 1	1200: 1	1200: 1	1200: 1	1200: 1
Color Gamut	73%	73%	73%	73%	73%	73%	73%	73%
Viewing Angle (H+V)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Backlight	LED	LED	LED	LED	LED	LED	LED	LED
Brightness (Typ.)	300 cd/m²	300 cd/m²	300 cd/m²	300 cd/m²	300 cd/m²	300 cd/m²	300 cd/m²	300 cd/m²
Response Time	8 ms	8 ms	8 ms	8 ms	8 ms	8 ms	8 ms	8 ms
Operation Hour	24 Hours / 7 Days	24 Hours / 7 Days	24 Hours / 7 Days	24 Hours / 7 Days	24 Hours / 7 Days	24 Hours / 7 Days	24 Hours / 7 Days	24 Hours / 7 Days
Lifetime (hours)	50,000 H	50,000 H	50,000 H	50,000 H	50,000 H	50,000 H	50,000 H	50,000 H
System - Android (Default system without touch)								
Operation System	Android 7	Android 7	Android 7	Android 7	Android 7	Android 7	Android 7	Android 7
Core	RK3288	RK3288	RK3288	RK3288	RK3288	RK3288	RK3288	RK3288
RAM/ROM	2G + 32G	2G + 32G	2G + 32G	2G + 32G	2G + 32G	2G + 32G	2G + 32G	2G + 32G
Touch System (Add on)								
Sensing Type	IR /Capacitive Touch	IR /Capacitive Touch	IR /Capacitive Touch	IR /Capacitive Touch	IR/Capacitive Touch	IR /Capacitive Touch	IR/Capacitive Touch	IR /Capacitive Touch
Windows 10	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G	i5 3 gen 4G + 128G
Touch Precision	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm	≤1/≤ 2.5 mm
Touch Point	20/10 points multi-touch	20/10 points multi-touch	20/10 points multi-touch	20/10 points multi-touch	20/10 points multi-touch	20/10 points multi-touch	20/10 points multi-touch	20/10 points multi-touch
Response Time	≤8/≤ 3 ms	≤8/≤ 3 ms	≤8/≤ 3 ms	≤8/≤ 3 ms	≤8/≤ 3 ms	≤8/≤ 3 ms	≤8/≤ 3 ms	≤8/≤ 3 ms
Dimension								
Overall Size (mm)	743×437.40×65.5	985×573.6×67.5	1141×661.6×67.5	1258.2×728.6×67.5	1466.4×841.5×73.4	1706.56×992.26×86	1916.7×1101.7×90	2204×1264×104
Package Size (mm)	860×550×190	1100×685×190	1255×775×190	1370×845×190	1647×1133×267	1869×1256×267	2116×1395×267	2360×1455×285
Net Weight (KG)	14	21	26	30	40	55	73	115
Gross Weigh (KG)	19	27	34	39	52	71.5	95	150
Connectivity								
HDMI Out	1	1	1	1	1	1	1	1
USB 2.0	2	2	2	2	2	2	2	2
RJ45	1	1	1	1	1	1	1	1
TF card slot	1	1	1	1	1	1	1	1
Headset	1	1	1	1	1	1	1	1
RS232	1	1	1	1	1	1	1	1
WIFI & Bluetooth	Build-in	Build-in	Build-in	Build-in	Build-in	Build-in	Build-in	Build-in
Build-in Speaker								
Track	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Loudspeaker	2 × 15W	2 × 15W	2 × 15W	2 × 15W	2 × 15W	2 × 15W	2 × 15W	2 × 15W
Power								
Power Consumption	80W	100W	120W	150W	225W	260W	400W	500W
Power Supply	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz	AC 100-240V,50/60Hz
Standby	≤1W	≤1W	≤1W	≤1W	≤1W	≤1W	≤1W	≤1W
Package								
Accessory	Power Cord 1 / Wall Mount 1							
Installation Mode	Wall-mounting /Hanging / Foot mounting							

■ Appearance

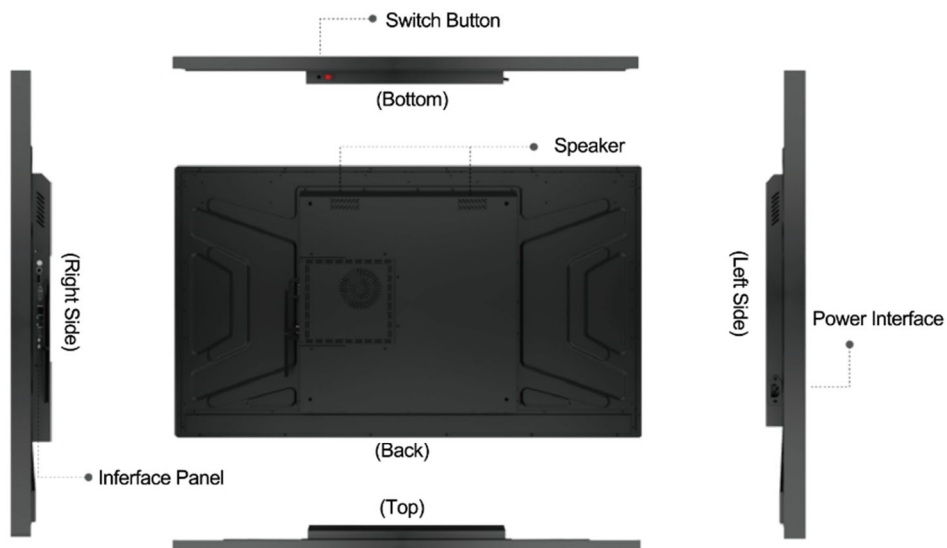


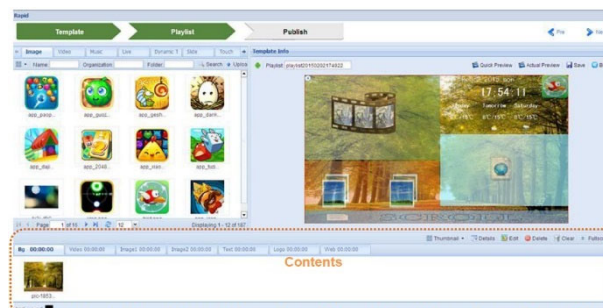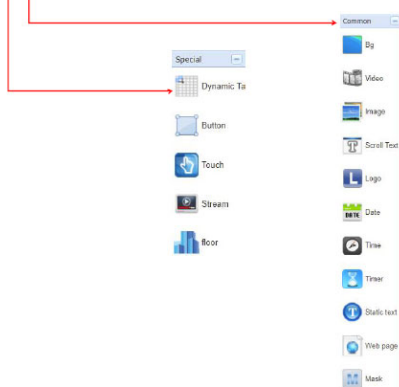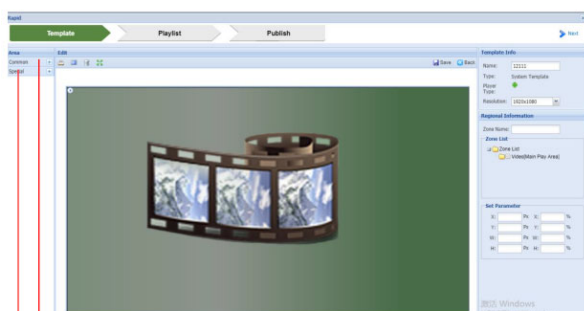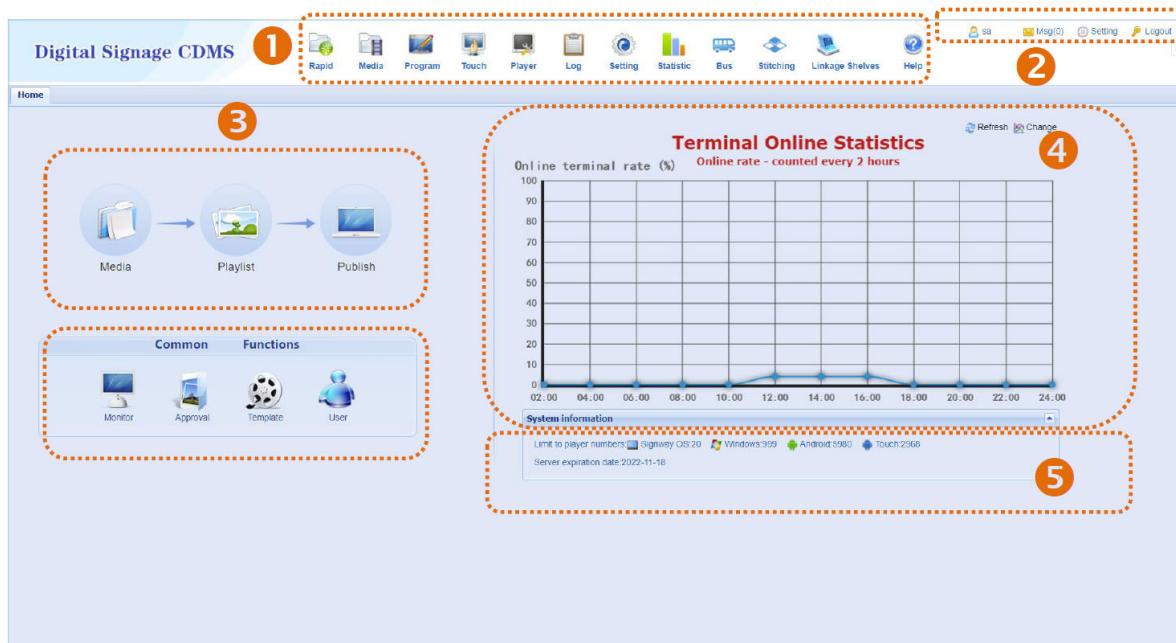

Click the button New to open the IMP editing page.

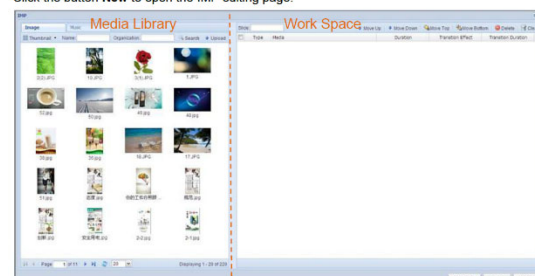

Wall-mounting

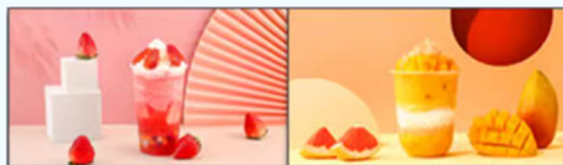

Hanging



Foot mounting



Indoor advertising machine



Public Scene



Elevator Advertising



Sales center



Exhibition
Demonstration



Medical Clinic



Catering industry

Touch query interactive all-in-one machine



Financial banks



Exhibition Hall
Science Museum



Party building
government



Car 4S Store Display



Real estate sales display



Front desk lobby



Corporate publicity
and display



Store



Shopping mall cinema

Attention: The content is for reference only. Please refer to the actual product.
Any changes will not be notified separately.